

Remote Sediment Property From Chirp Data Collected During ASIAEX

Steven G. Schock
Department of Ocean Engineering
Florida Atlantic University
Boca Raton, Fl. 33431-0991
phone: 561-297-3442 fax: 561-297-3885 email: schock@oe.fau.edu

Grant Number #: N00014-00-1-0408
<http://www.oe.fau.edu/CHIRP/CHIRP.html>

LONG TERM GOALS

The long term research objective is to develop a cost effective technique for mapping the top 20 meters of sediment properties using acoustic remote sensing. In previous years, a chirp sonar was developed to provide quantitative, wideband reflection measurements of the seabed with a vertical resolution of 10 cm. Neural network and fuzzy logic techniques have been used to automatically detect subsurface layer interfaces and to find the boundaries between sediment layers. Signal processing techniques were developed to estimate vertical profiles of impedance, attenuation and volume scattering coefficients. The procedures for remotely estimating sediment properties are being verified using core data and insitu measurements. New signal processing techniques have been developed that allow several sources transmitting simultaneously in different bands to build a wideband FM pulse in the far field. That wideband data is being used to improve the accuracy of the remote acoustic sediment property prediction.

OBJECTIVES

- 1) Conduct chirp sonar surveys to provide imagery of sediment layering and acoustic sediment properties needed by ASIAEX investigators modeling acoustic propagation in the South and East China Seas.
- 2) Compare remote chirp measurements of sediment properties with direct property measurements made from cores to determine the accuracy of remote predictions.
- 3) Deliver reflection profiles, sediment impedance and attenuation data to ocean acoustics investigators modeling sound propagation.

APPROACH

The technical approach for the ASIAEX surveys is to collect normal incidence FM reflection data with a towed chirp sonar over the range of 1.5 to 4 kHz providing images of the top 50 meters of sediments and vertical profiles of acoustic sediment properties for use by ASIAEX scientists modeling acoustic propagation. The multiband chirp technology allows the collection of normal incidence reflection data over a band of 1 to 15 kHz while the towed vehicle emulates a point acoustic source. The point source is emulated using 2 piston sources that operate over different but overlapping frequency bands. Each single piston source has a wide beamwidth (greater than 40 degrees) over its band of operation. Multiple transducers can be driven simultaneously with chirp pulses with different bands to generate

Report Documentation Page				Form Approved OMB No. 0704-0188	
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE 30 SEP 2002		2. REPORT TYPE		3. DATES COVERED 00-00-2002 to 00-00-2002	
4. TITLE AND SUBTITLE Remote Sediment Property From Chirp Data Collected During ASIAEX				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Department of Ocean Engineering,,Florida Atlantic University,,Boca Raton,,Fl, 33431				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited					
13. SUPPLEMENTARY NOTES					
14. ABSTRACT The long term research objective is to develop a cost effective technique for mapping the top 20 meters of sediment properties using acoustic remote sensing. In previous years, a chirp sonar was developed to provide quantitative, wideband reflection measurements of the seabed with a vertical resolution of 10 cm. Neural network and fuzzy logic techniques have been used to automatically detect subsurface layer interfaces and to find the boundaries between sediment layers. Signal processing techniques were developed to estimate vertical profiles of impedance, attenuation and volume scattering coefficients. The procedures for remotely estimating sediment properties are being verified using core data and insitu measurements. New signal processing techniques have been developed that allow several sources transmitting simultaneously in different bands to build a wideband FM pulse in the far field. That wideband data is being used to improve the accuracy of the remote acoustic sediment property prediction.					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT Same as Report (SAR)	18. NUMBER OF PAGES 5	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			

the wideband chirp pulse in the water that appears (in the far field) to emanate from a point acoustic source. Multiple rectangular receiving arrays of various sizes are used to control receiving beamwidth and scattering by spatial filtering. The bandwidth of the sonar provides subsurface imagery with 10 cm vertical resolution. The enhanced bandwidth also improves the accuracy of attenuation and phase measurements needed for impedance inversion and dispersion measurements.

Dr. Schock supervises the research program including graduate and undergraduate students and at sea experiments. Jim Wulf is the lead engineer on the project.

WORK COMPLETED

During survey of the South China Sea, chirp data was collected along tracks corresponding to the across shelf and along shelf acoustic propagation lines. Due to the high attenuation of the sandy seabed, a 50 msec 1.5 –4 kHz FM was used to generate the chirp data sets instead of the proposed band of 1.5 to 15 kHz thereby ensuring subsurface penetration was adequate for imaging the subsurface sediment layering in the sandy seabed. The time series data was filtered into 8 pass bands to generate 8 images with center frequencies of 1 kHz spacing starting at 1.6 kHz and ending at 4 kHz. The rolloff of the attenuation function of the uppermost sediment layer is estimated by dividing the average reflection amplitude of the sediment layer interface echo from the base of the surficial layer by the average amplitude of the sediment-water interface echo for each bandpass image. The amplitude ratios are plotted as a function of frequency. The slope of a line fitted to the frequency function in a least squares sense is called the attenuation rolloff.

RESULTS

For the across shelf propagation line, the slope of the attenuation function varied from about 0.4 dB/m/kHz near the receiver arrays at the shallow end in about 120 meters of water to a minimum of 0.12 dB/m/kHz in about 250 meters of water to 0.40 dB/m/kHz near the source in 340 meters of water. For the along shelf propagation line the attenuation rolloff varies between 0.51 dB/m/kHz and 0.11 dB/m/kHz. Figures 1 and 2 summarize the attenuation measurements by plotting the attenuation rolloff as a function of water depth/

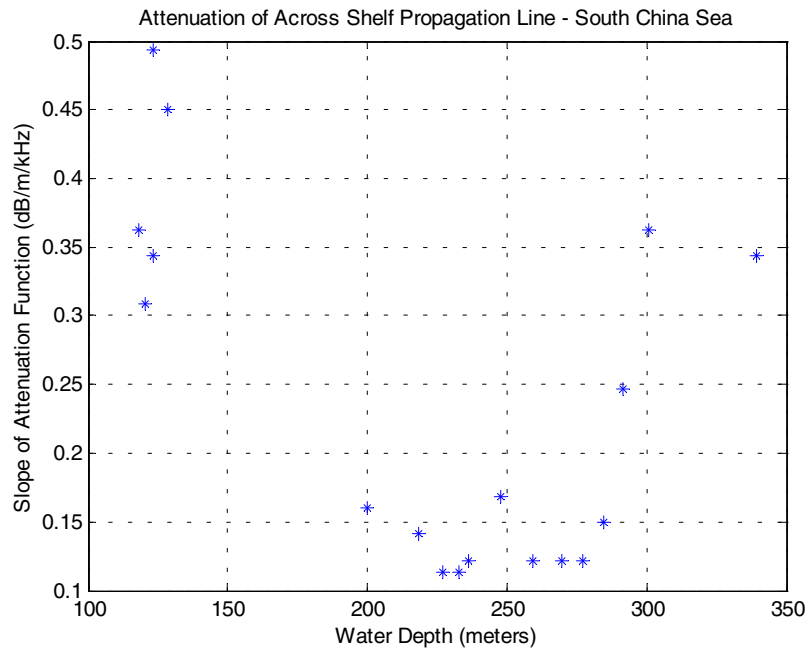


Figure 1. Attenuation rolloff for the frequency range of 1.6 to 4.0 kHz is plotted as a function of water depth for the across shelf propagation line. Note that the attenuation of the sediments is lowest for water depths in the range of 200 to 280 meters. Attenuation increases toward the ends of the across shelf propagation line indicating coarser grain sediments.

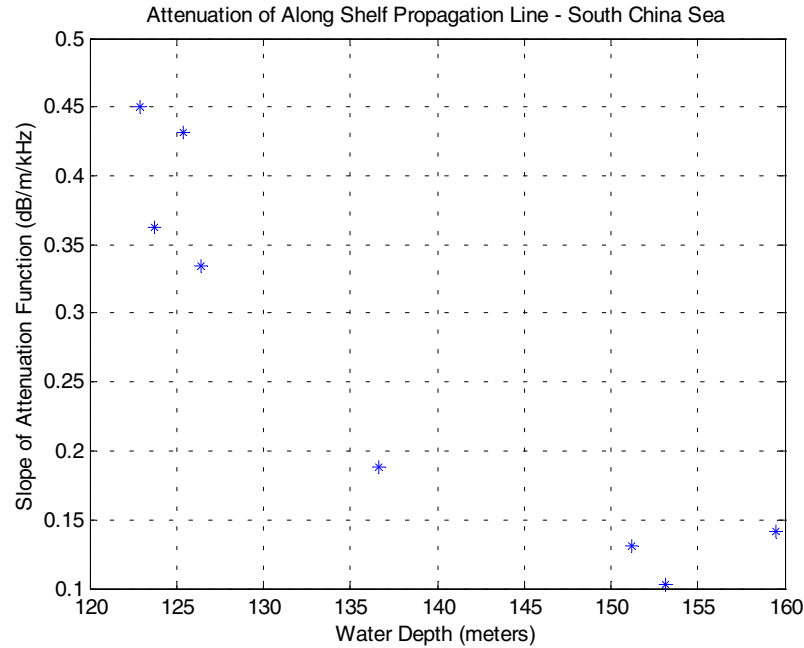


Figure 2. Attenuation rolloff for the frequency range of 1.6 to 4.0 kHz is plotted as a function of water depth for the along shelf propagation line. Note that the attenuation of the sediments is lowest for larger water depths suggesting that finer grain sediments occur in the deeper section of the line.

IMPACT/APPLICATIONS

Instrumentation and sediment classification procedures have been developed to predict the acoustic and physical properties of the seabed using normal incidence reflection data collected by FM subbottom profilers. This development provides a cost effective method of surveying the top 10 meters of the seabed and obtaining vertical profiles of attenuation and acoustic impedance. Physical properties can be estimated from the acoustic properties using empirical methods.

TRANSITIONS

The reflection profiles and attenuation measurements have been forwarded to a WHOI investigator conducting acoustic propagation modeling.

RELATED PROJECTS

“Remote Seabed Sediment Classification and Sediment Property Estimation Using High Resolution Reflection Profiles,” ONR G&G Grant. The techniques developed under this grant are being used to process data for ASIAEX.

PUBLICATIONS

1. “Remote estimation of seabed attenuation using a chirp sonar during ASIAEX,” S. G. Schock, ASA meeting, Cancun, Dec. 2002 (abstract).